

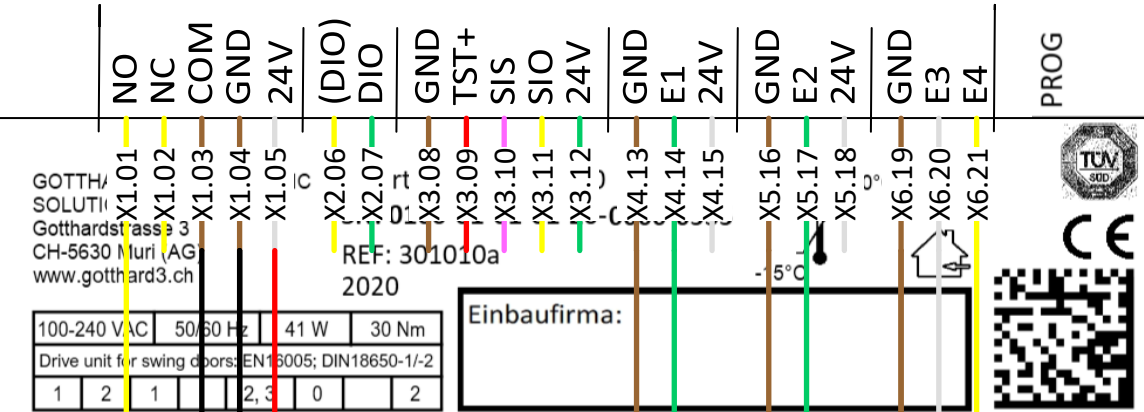


electrical diagram EffEff 509X / 529X with smartdoor TURN

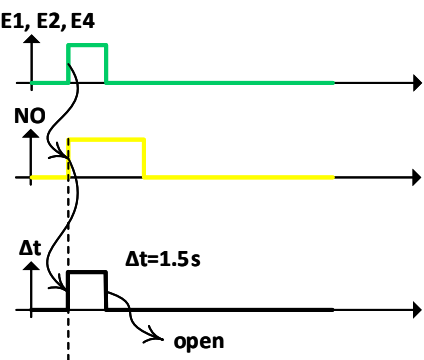

- Access control: e-reader / code
- Key switch
- Button
- Remote control e.g. timer
- Motion detector e.g. IR sensor

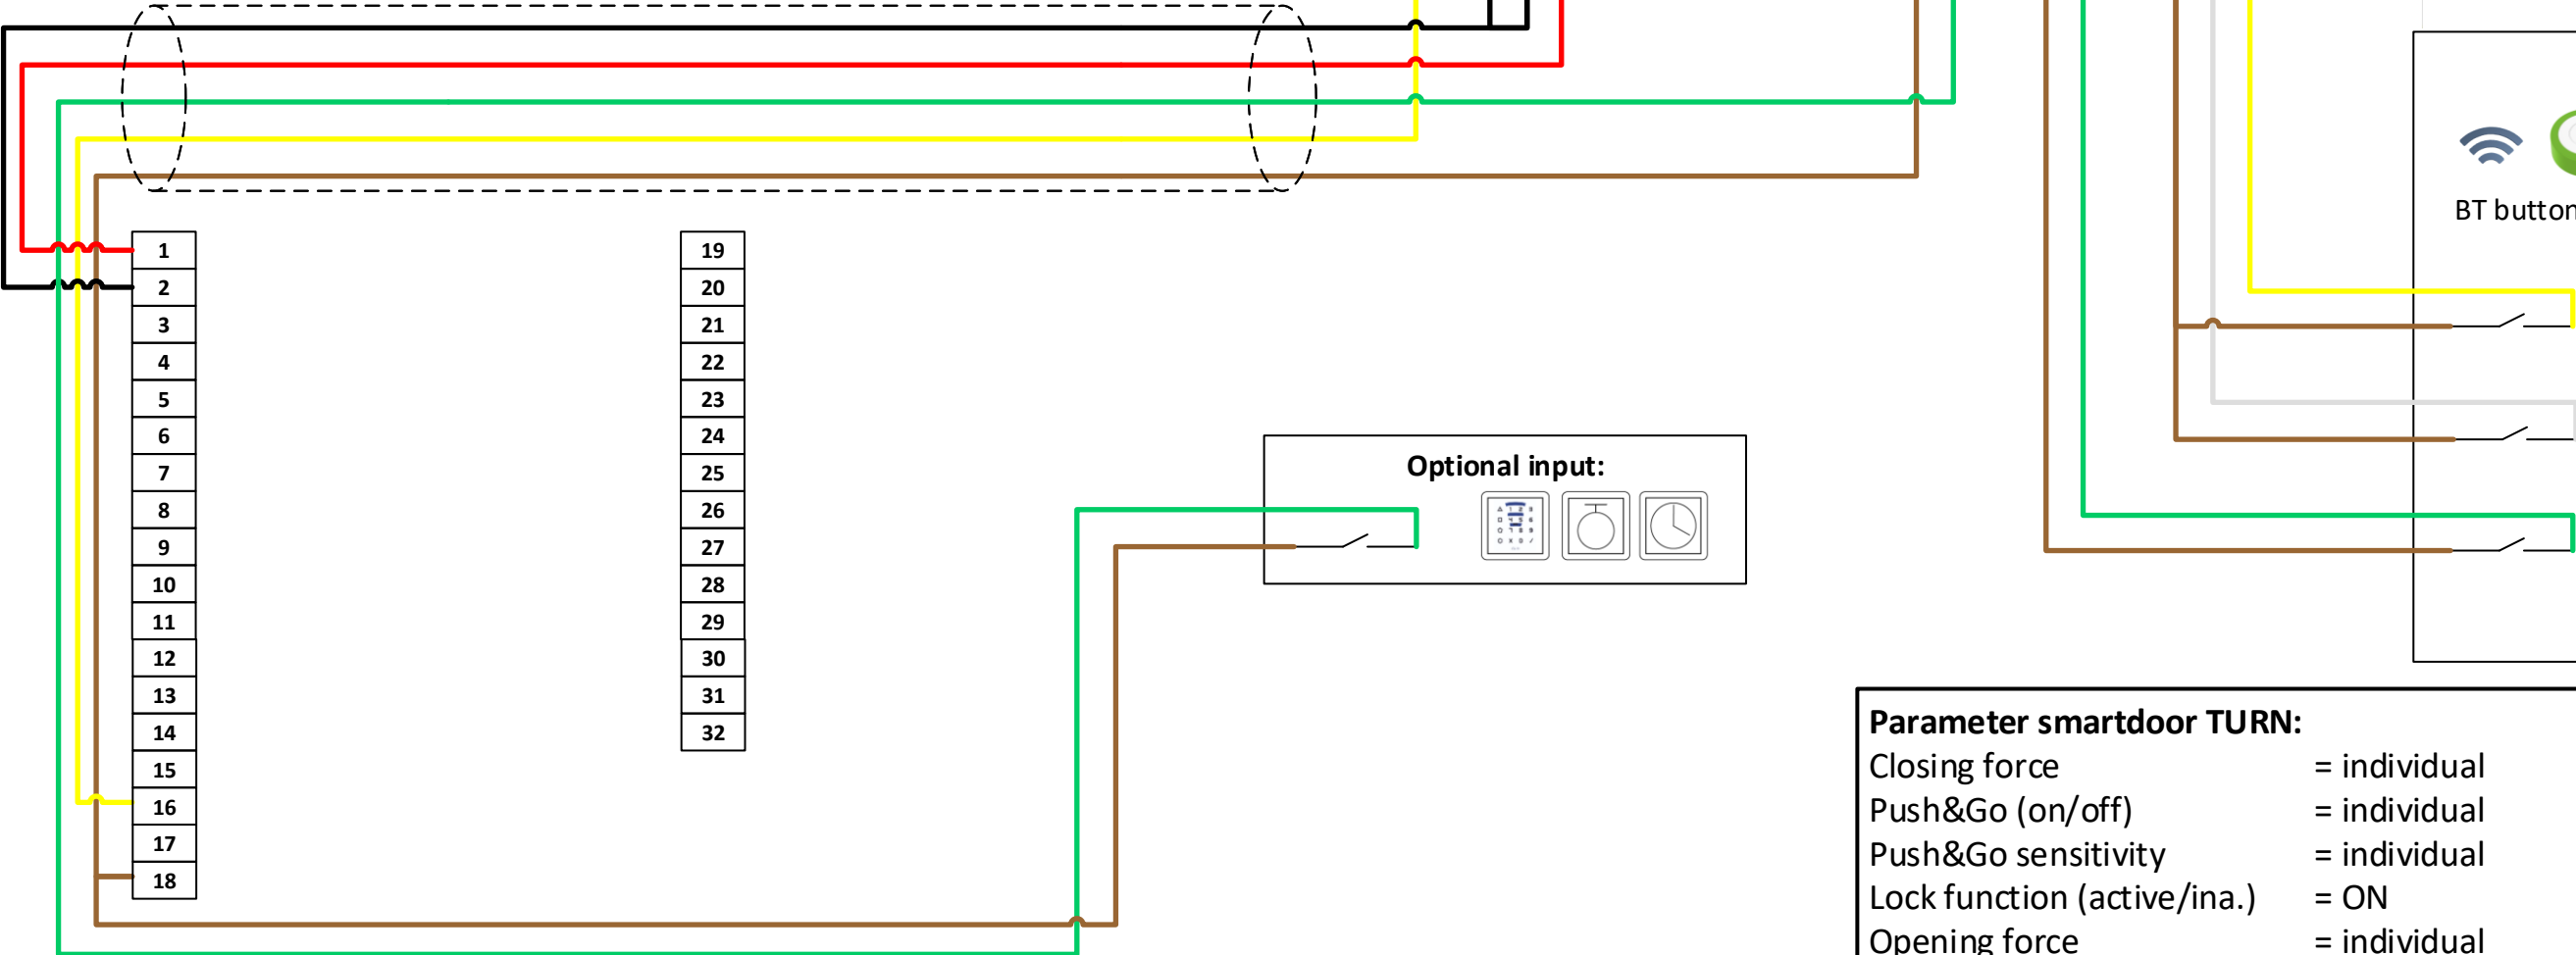

Optional input:

BT button, BT module, Smartphone

Parameter smartdoor TURN:

Closing force	= individual
Push&Go (on/off)	= individual
Push&Go sensitivity	= individual
Lock function (active/ina.)	= ON
Opening force	= individual
Delay time	= 10s
Input E1	= opening pulse (day + night) + LF
Input E2	= opening pulse (day + night)
Input E3	= day/night operation
Input E4	= opening pulse (day only)

Parameter EffEff 509X/529X:

